


Door Features


- Continuously welded seamless design
- Highest quality construction
- 1-3/4" thickness standard
 - other thicknesses available
- High quality A60 Galvannealed Steel, G90 optional
 - 18, 16, 14, and 12 gauge available
- Rust inhibitive prime coat
- End-caps inverted standard (flush optional)
- Beveled or square edges
- Fire rated to 3 hours
 - Standard hardware reinforcements
 - 7 ga. hinge, 1/4" backset standard
 - 16 ga. "161" lock
 - 14 ga. "86" lock
 - 14 ga. closer



Core Options

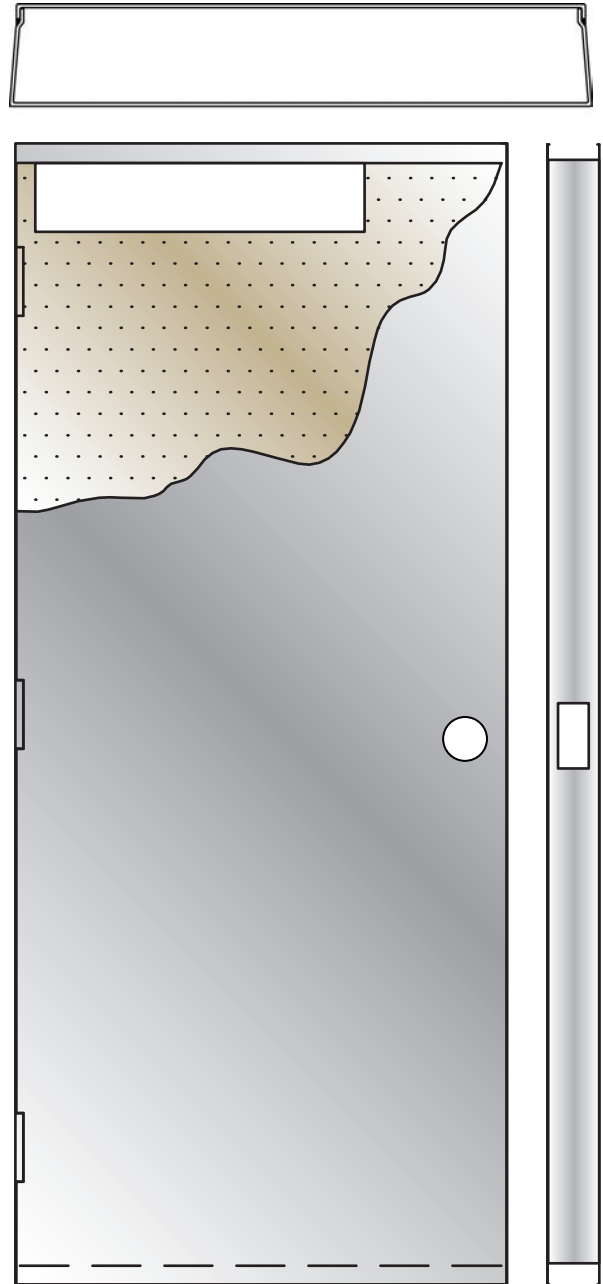

Polystyrene



Honeycomb



Steel Stiffened



Temperature Rise